



c1	h1	p2	m	l	d	t	u	M
20	275	424	300	130	65	69	18	M16

	80 SL	90 S	90 L	100 L	112 M	132 S	132 M
k	712	729	754	787	797	842	886
k1	832	854	879	922	932	987	1031
a1	300	300	350	350	350	350	350
b1	230	230	250	250	250	250	250
e1	265	265	300	300	300	300	300
f1	4	4	5	5	5	5	5
s1	14	14	18	18	18	18	18



Klemens Kutusu Bağlantı Pozisyonları
Mounting position of terminal box

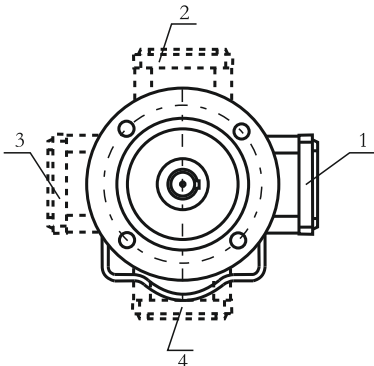

T₂ max(Nm) : 2800

Yük
Load

Çıkış Devir Sayısı n₂
Output speed n₂

	0-15	30-50	15-30	50-100	100-140
Pr (N)	8500	7800	7200	6200	5500
Pa(N)	3400	3100	2700	2300	2100

Redüktöre gelen radyal ve eksenel yükler
Radial and axial loads on the gearbox

MİL ÇAP TOLERANSLARI
0-50 mm ISO K6
50mm üstü ISO J6
k1 Frenli redüktörlere aittir.

Shaft diameter tolerances
0-50 mm ISO K6
Up 50 mm ISO J6
Dimensions k1 is for motors with brake