



a	b	c	e	f	s	i	h	p	m	l	d	t	u	M
300	360	55	370	450	26	185	315	490	350	140	75	79,5	20	M16

	132 M	160 M	160 L	180 M	180 L	200 L	225 S	225 M
k	853	933	977	998	1036	1093	1127	1152
k1	998	1103	1147	1171	1206	1293	-	-



Klemens Kutusu Bağlantı Pozisyonları  
Mounting position of terminal box

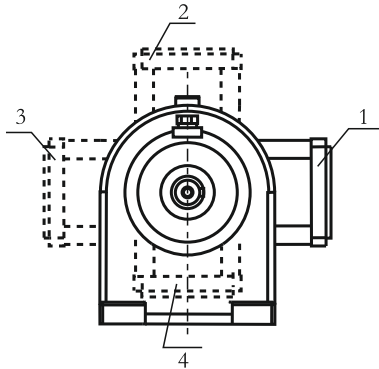

$T_2 \text{ max(Nm)} : 4000$

Yük  
Load

Çıkış Devir Sayısı  $n_2$   
Output speed  $n_2$

	0-15	30-50	15-30	50-100	100-140
$Pr$ (N)	16000	11500	10900	9000	8000
$Pa$ (N)	5200	4500	4000	3500	2900

Redüktöre gelen radyal ve eksenel yükler  
Radial and axial loads on the gearbox

MİL ÇAP TOLERANSLARI  
0-50 mm ISO K6  
50mm üstü ISO J6  
k1 Frenli redüktörlere aittir.

Shaft diameter tolerances  
0-50 mm ISO K6  
Up 50 mm ISO J6  
Dimensions k1 is for motors with brake