



	100 S	112 M	132 S	160 M	160 L
k	616	630	715	784	828
k1	751	765	860	954	998
a1	250	250	300	300	350
b1	180	180	230	230	250
c1	16	16	20	20	20
e1	215	215	265	265	300
f1	4	4	4	4	5
s1	14	14	14	14	18

h1	p2	m	l	d	t	u	M
245	370	250	100	50	53,5	16	M14



Klemens Kutusu Bağlantı Pozisyonları
Mounting position of terminal box

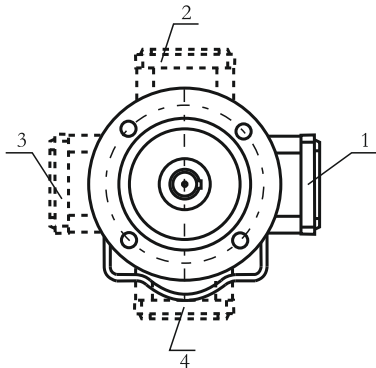

$T_2 \max(\text{Nm}) : 1200$

Yük
Load

Çıkış Devir Sayısı n_2
Output speed n_2

	0-15	30-50	15-30	50-100	100-140
P_r (N)	5200	4500	3900	3500	3000
P_a (N)	2100	1900	1700	1500	1200

Redüktöre gelen radyal ve eksenel yükler
Radial and axial loads on the gearbox

MİL ÇAP TOLERANSLARI
0-50 mm ISO K6
50mm üstü ISO J6
 k_1 Frenli redüktörlere aittir.

Shaft diameter tolerances
0-50 mm ISO K6
Up 50 mm ISO J6
Dimensions k_1 is for motors with brake